
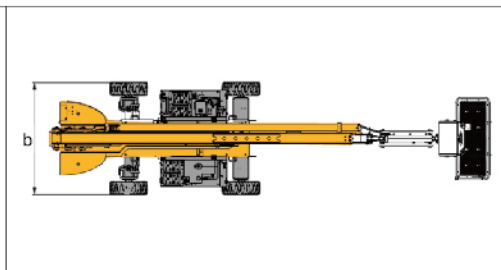


Parameter


Item	Unit	XGS22ACK-Li
Dimension		
a.Overall length (stowed)	mm	9260
Overall length (transportation)	mm	6790
b.Overall width	mm	2490
c.Overall height	mm	2720
Platform dimension	mm	2440 × 900 × 1150
d.Wheelbase	mm	2500
Max. working height	mm	22900
Max. platform height	mm	20900
Max. working range	mm	15400
Performance		
Max.load capacity	kg	300 (Unrestricted) / 460 (Restricted)
Walking speed (stowed)	km/h	5
Walking speed (elevated/extended)	km/h	0.6
Boom luffing range	°	-5 ~ 75
Rotation angle of turntable	°	360 continuous
Tailswing	mm	1710
Rotation angle of platform	°	160
Min. turning radius (outside)	mm	5500
Min. turning radius (inside)	mm	3500
Overall weight	kg	10300
Max. gradeability (counterweight upwards)	%	40% (22°)
Max. gradeability (counterweight downwards)	%	30% (17°)
Power source		
Battery	/	420 Ah/48 V DC (standard) / 404 Ah/48 V lithium (optional)
Power unit	kW	12 kw/32 V AC
Auxiliary power unit	L	2.3kw/12 V DC
Travel motor	L	3.3kw/32 V AC

Options

Anti extrusion device / Tool tray / Working light / Anti-squeeze hand-assisted track of the platform
Half-height mesh platform / Aircraft protection device / Anti-falling assembly

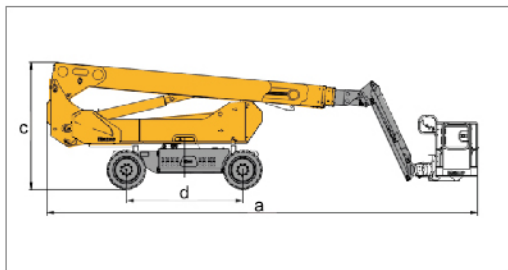

Work Curve Graph

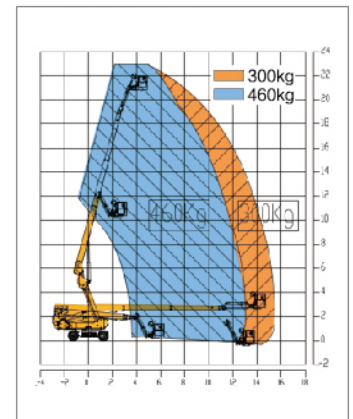

Global service hotline: 400 110 9999

